

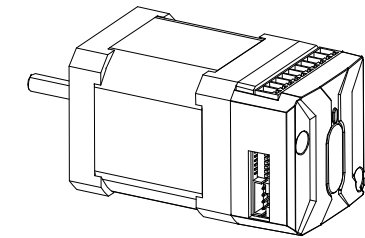
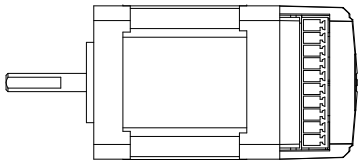
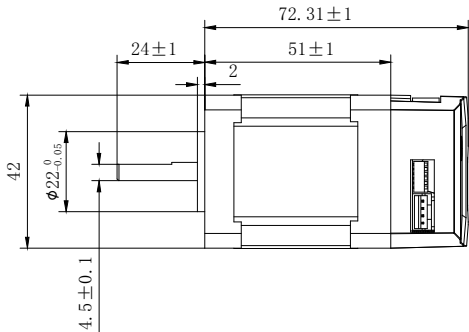


Dimension: (Unit: mm)



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100M0hm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	1.5 A
Voltage	1.9 V
DC Resistance/phase ±10%	2.4 Ω
Inductance/phase ±20%	4.2 mH
Holding torque	0.6 N•M
Detent torque	0.068 N•M
Inertia	0.068 kg•cm ²
Weight	0.35kg

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	2023.5.10		初版	王洪松

设计 Designed	王洪松 2023.5.10	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建 2023.5.10	第一角画法 First Angle projection	名称 Title Integrated stepper motor
批准 Approved	黄捷建 2023.5.10	版本/版次 A/01	iEM-1706
零件编号 Part No.	LS-MT-01-07A	图号 DWG. NO.	LS- iEM-1706